



POLYMER CONCRETE HANDHOLE 24"X36"X24"

POLYMER CONCRETE


TIER 22: Driveway, parking lot, and offroad applications
subject to occasional non deliberate heavy vehicular traffic

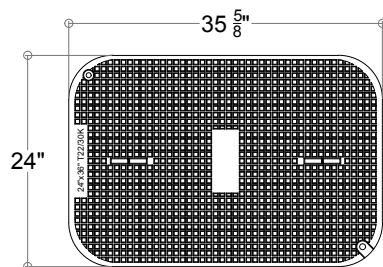


**COVER
TOP VIEW**

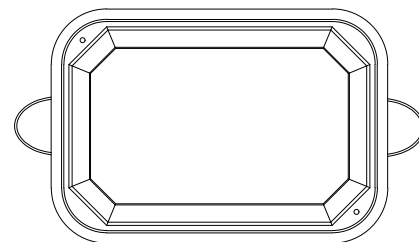


**BOX
TOP VIEW**

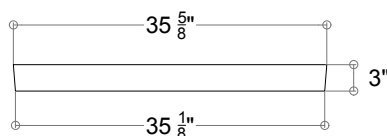


**COVER
FRONT VIEW**

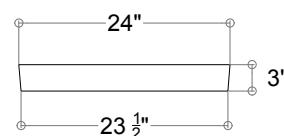

**COVER
SIDE VIEW**

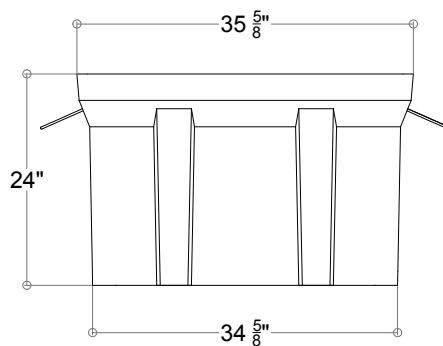


**BOX
FRONT VIEW**

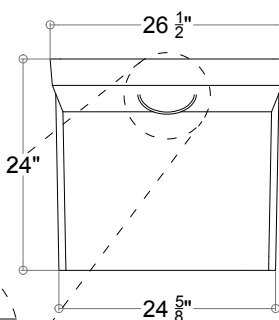

**BOX
SIDE VIEW**

$\frac{3}{16}$ " wired steel cable

TOLERANCES: +- 1.5% DIMENSIONS: IN

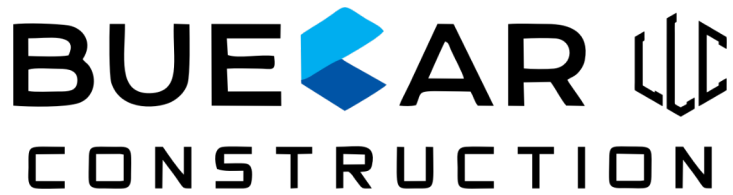

POLYMER CONCRETE HANDHOLE 24"X36"X24"

POLYMER CONCRETE

TIER 22: Driveway, parking lot, and offroad applications
subject to occasional non deliberate heavy vehicular traffic

• FEATURES

- Compressive strength: 800 kg/cm²
- Non conductive material (dielectric)
- complies with ANSI SCTE 77 2017
 - Resistance to chemical reagents
 - Simulated sunlight exposure
 - Water absorption
 - Flammability
 - Cover impact
 - Coefficient of friction

• Specifications

- Polymer concrete cover and box reinforced with fiberglass
- $\frac{3}{16}$ " stainless steel lift pin
- $\frac{1}{2}$ " stainless steel hexbolt fastening system
- $\frac{3}{16}$ " wired steel cable
- Load rating: Tier 22

Dimensions: 24" x 36" x 24"

Tolerances: +- 1.5%

Approximate weight:

- Lid: 208 lb
- Box: 195 lb

Color: Beige.

